

# 'T-JAW



MITER SAW

FOR STRAIGHT AND ANGLE CUTTING







**MS-1018VS** SEMI-AUTO, VARIABLE SPEED

**MS-1018S** SEMI-AUTO, FOUR SPEED

**MS-1018V** MANUAL, VARIABLE SPEED

**MS-1018** MANUAL, FOUR SPEED

# 10" MITER SAW Miter Saw

## TECHNICAL DATA:

CAPACITY 90°:	<ul style="list-style-type: none"> <li>● 10"(254mm)</li> <li>■ 10"x10"(254 x 254mm)</li> <li>■ 16"x10"(406.4 x 254mm) or 18"x6" (457.2 x 152.4mm)</li> </ul>
CAPACITY 45°:	<ul style="list-style-type: none"> <li>● 8"(203.2mm)</li> <li>■ 6"x6"(152.4 x 152.4mm)</li> <li>■ 8"x6"(203.2 x 152.4mm) or 4"x9" (101.6 x 228.6mm) or 3"x10"(76.2 x 254mm)</li> </ul>
SAWBLADE LENGTH:	136.8"(3475mm)
MOTOR:	2 HP
SPEED RANGE:	FOUR SPEED, 50HZ. :56, 154, 246, 328 FPM (17, 47, 75,100 MPM) FOUR SPEED, 60HZ. :69, 184, 295, 394 FPM (21, 56, 90,120 MPM) VARIABLE SPEED, 50HZ. :56-269 FPM (17-82 MPM) VARIABLE SPEED, 60HZ. :69-321 FPM (21-98 MPM)
BLADE WHEELS:	15.4"(391mm) DIA. FLANGED CAST IRON.
FLOOR SPACE:	61"x51"(1550 x 1300mm)
NET WEIGHT:	836LBS(380KGS)
GROSS WEIGHT:	990LBS(450KGS)
MACHINE DIMENSIONS:	74.80"(1900mm)L x 29.13"(740mm)W x 39.37"(1000mm)H
PACKING SIZE:	6.69'(2040mm)L x 2.95'(900mm)W x 3.77'(1150mm)H
COOLANT PUMP:	0.125HP

## OPTIONALS:


INFEEED 19"x40" AND OUTFEED 19"x27" STOCK ROLLER TABLE WITH LEGS.

\*Illustrations and specifications are not binding to details as improvements are incorporated from time to time.




## TECHNICAL DATA:

CAPACITY 90°:	● 12"(304.8mm) ■ 12"x12"(304.8 x 304.8mm) ■ 16"x10"(406.4 x 254mm) or 18"x6"(457.2 x 152.4mm)
CAPACITY 45°:	● 8"(203.2mm) ■ 8"x8"(203.2 x 203.2mm) ■ 8"x12"(203.2 x 304.8mm)
SAWBLADE LENGTH:	136.8"(3475mm)
MOTOR:	2 HP
SPEED RANGE:	FOUR SPEED, 50HZ. :56, 154, 246, 328 FPM (17, 47, 75,100 MPM) FOUR SPEED, 60HZ. :69, 184, 295, 394 FPM (21, 56, 90,120 MPM) VARIABLE SPEED, 50HZ. :56-269 FPM (17-82 MPM) VARIABLE SPEED, 60HZ. :69-321 FPM (21-98 MPM)
BLADE WHEELS:	15.4"(391mm) DIA. FLANGED CAST IRON
FLOOR SPACE:	61"x51"(1550 x 1300mm)
NET WEIGHT:	880LBS(400KGS)
GROSS WEIGHT:	1078LBS(490KGS)
MACHINE DIMENSIONS:	74.80"(1900mm)L x 29.13"(740mm)W x 40.16"(1020mm)H
PACKING SIZE:	6.69'(2040mm)L x 2.95'(900mm)W x 3.77'(1150mm)H
COOLANT PUMP:	0.125HP

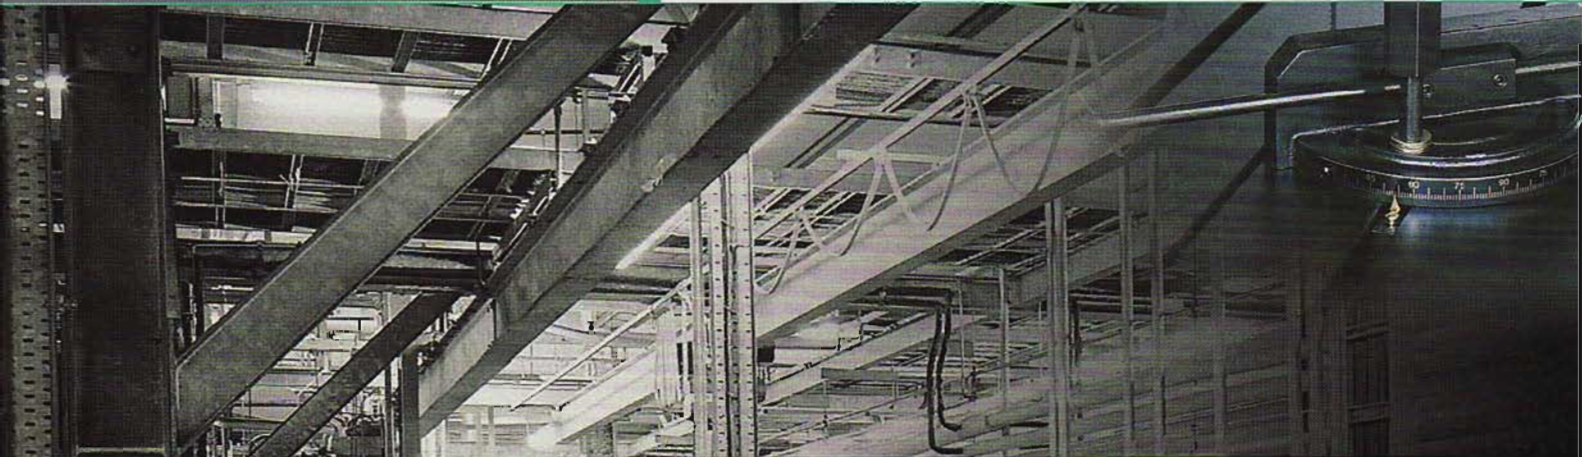

**MS-1218V** MANUAL, VARIABLE SPEED  
**MS-1218VS** SEMI-AUTO, VARIABLE SPEED

**MS-1218** MANUAL, FOUR SPEED  
**MS-1218S** SEMI-AUTO, FOUR SPEED

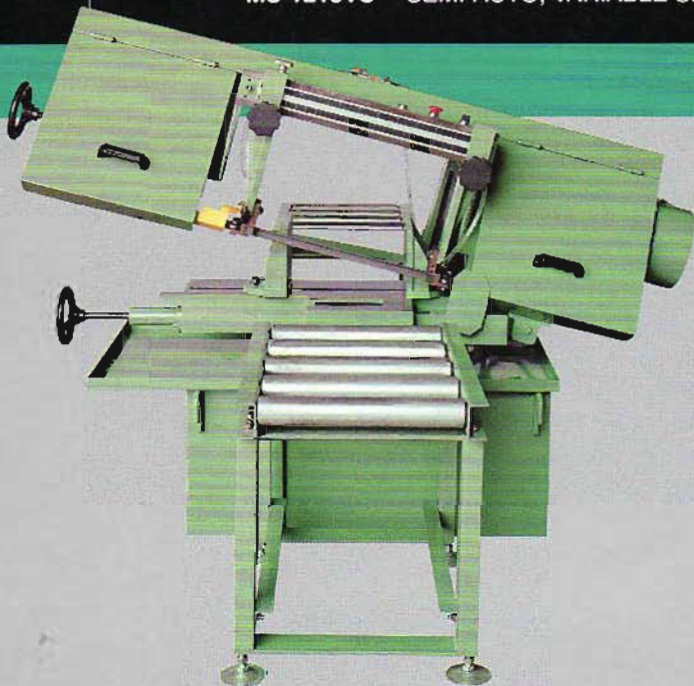

### OPTIONALS:

INFEED 19"x40" AND OUTFEED 19"x27" STOCK ROLLER TABLE WITH LEGS.

Illustrations and specifications are not binding to details as improvements are incorporated from time to time.

# 12" MITER SAW

## For Straight And Angle Cutting



#### STANDARD MACHINE FEATURES:

- ◎0°-45° MITER CUTTING, MAKE ANGLE CUTS WITHOUT SWINGING LONG STOCK.
- ◎2HP MAIN DRIVE WITH MAGNETIC STARTER AND OVERLOAD PROTECTION.
- ◎0.125HP COOLANT APPLICATION THROUGH BOTH GUIDES.
- ◎SOLID CARBIDE BLADE GUIDES WITH ROLLERS.
- ◎QUICK POSITION VISE.
- ◎AUTOMATIC SHUT-OFF DEVICE TO ON-OFF CONTROL.
- ◎TOTALLY ENCLOSED TRANSMISSION.
- ◎BLADE CLEANING BRUSH.
- ◎CAST IRON TABLE.
- ◎1" WIDE BLADE.
- ◎STOCK STOP.
- ◎HEADCONTROL IS HYDRAULIC CYLINDER OPERATED BY NEEDLE VALVE.
- ◎QUICK AND SIMPLE SPEED CHANGE.
- ◎EASILY ADJUSTED HEAD FEED.

# **T-JAW**

**MACHINERY WORKS CO., LTD.**

NO. 13, KUNG 9 ROAD, JIH NAN LI, TA CHIA CHENG, 437, TAICHUNG HSIEN, TAIWAN

TEL: 886-4-2681-3864 • 2681-5035 FAX: 886-4-2681-5055

<http://www.tjaw.com.tw> E-mail: [bandsaw@ms15.hinet.net](mailto:bandsaw@ms15.hinet.net)

